

S&S MODELS

U.S. M198 155mm HOWITZER

INSTRUCTIONS FOR FIRING MODE

(CREW ALSO AVAILABLE SEPARATELY)

DESIGNED IN THE LATE 70'S FOR THE US ARMY AND MARINE CORPS, ALSO EXPORTED TO THE FOLLOWING COUNTRIES:- AUSTRALIA, THAILAND, LEBANON, HONDURAS, TUNISIA AND IRAQ. NORMAL TRACTOR IS A 5 TON TRUCK



THE KIT PARTS LAID OUT

CHECK IF YOU HAVE ALL OF THE PARTS SHOWN.

IF ANY PARTS ARE MISSING PLEASE LET US KNOW AND WE WILL GLADLY SEND YOU REPLACEMENT ONES. SOME PARTS YOU WILL NOT NEED FOR THE FIRING MODE.

SAFETY WARNING:-

THIS MODELS CONTAINS LEAD AND SHOULD NOT BE EATEN OR CHEWED!

WASH HANDS AFTER HANDLING ALL METAL PARTS.



STEP 1

FIT THE 2 TRAIL LEGS TO THE CARRIAGE AND THEN ATTACH THE TRAVERSE PLATE TO THE BOTTOM OF THE CARRIAGE.



STEP 3

ATTACH THE WHEEL WITH THE SQUARE BACK TO THE RHS GUN SUPPORT AND FIX THAT TO THE SIDE OF THE GUN TRAVERSE PLATE AS SHOWN.




STEP 2

FIT THE FLAT PLATE TO THE TOP OF THE CARRIAGE AND THEN FIX BOTH OF THE EARTH SPADES TO THE ENDS OF THE TRAIL LEGS.



STEP 4

FIT THE LHS GUN SUPPORT UNDERSIDE OF GUN BARREL ARM TO THE GUN TRAVERSE PLATE, LEAVE THE GUN FREE TO PIVOT AT THIS STAGE



STEP 6

THEN FIT THE WHOLE ASSEMBLY TO THE GUN CARRIAGE FROM STEP 1 THEN FIT THE ROAD WHEELS TO THE CARRIAGE



STEP 7

FIT THE 2 LONG RODS INTO THE HOLES IN THE GUN BARREL AND THEN INTO THE BOTTOM OF THE BARREL SUPPORT ARMS.



STEP 8

THEN FIT THE 2 HYDRAULIC RAMS TO THE SUPPORT ARMS AND GUN BARREL.




STEP 9

FIX THE 2 REMAINING WHEELS TO THE LHS SUPPORT ARMS AS WELL AS THE SIGHT



STEP 10

FIT THE 2 SUPPORT WHEELS TO THE SIDE OF THE TRAILLEGS AND THEN FIT THE GUN LOCK TO THE LHS TRAIL LEG.

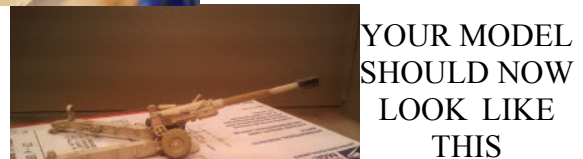

YOUR MODEL SHOULD NOW LOOK LIKE THIS

S&S MODELS
22 BRIAR CLOSE
BURNHAM ON SEA
SOMERSET U.K.
TA8 1HU

www.sandsmodels.com
sales@sandsmodels.com

PICTURE SITE:-

<http://s513.photobucket.com/albums/t339/sandsmodels/>

